
Editor

An editor for the Native-Function definition can be found here:
“cgi_studio_connector/bin/ComplexTypeEditor.exe”


If called with a file as first argument the editor will try to open the specified file.

Complex-Types

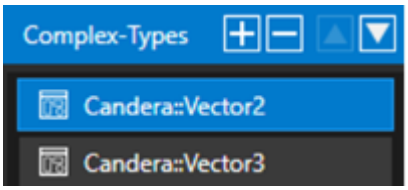

On the left side, Complex-Types can be added/removed and reordered using the respective buttons.

Properties:

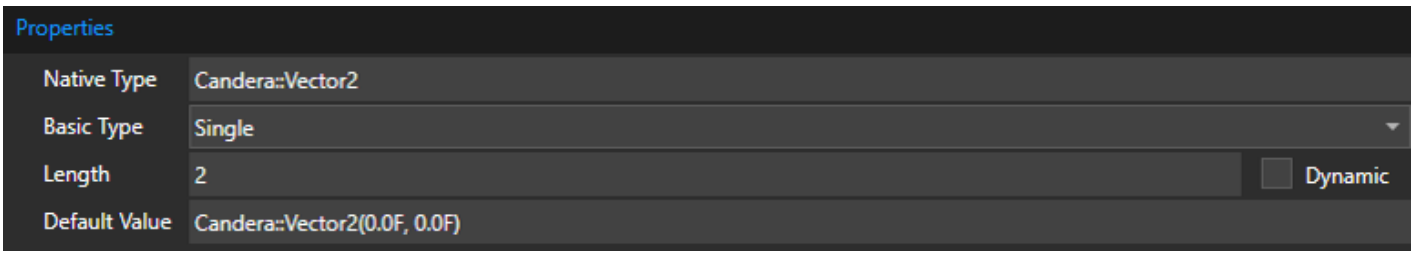

Property Name	Description
Native Type	C/C++ name of the native type
Basic Type	Basic type used to represent the Complex-Type. This type will be used when transferring data via the Interface.
Length	Length of the Complex-Type based on the Basic-Type. To use to a dynamic length (e.g. an array) the “Dynamic” checkbox can be used.
Default Value	Default value used for this Complex-Type.

Revision #3
Created 2024-10-07 03:31:50 UTC by Kanai Tomoaki
Updated 2025-04-14 04:05:29 UTC by Kanai Tomoaki